

word of mouth
from use

quality craftsmanship
manufacturing

innovation of
technology iteration

the spirit of artisan
inheritance

FOSHAN **YIPTECH** Machinery Technology co.,ltd



(+86)-13709666730



www.edgebandmachine.com



info@yipteh.com



Commercial Plaza, No.45 Fengxiang Road, Shunde District, Foshan City, Guangdong Province



YIPTECH

2009



FOSHAN YIPTECH MACHINERY TECHNOLOGY CO.,LTD

Full solution for customized furniture Edge

- Woodworking Portable Edge Banding Machines
- Woodworking Automatic Edge Banding Machines
- Pur Hot melt Glue Machines
- Machinery tools and kits

TABLE OF CONTENTS

03

*Company
Profile*

05

*Products
Certificates*

06

*Woodworking Automatic
Edge Banding machines*

12

*Woodworking Portable
Edge Banding machines*

15

*Pur Hot Melt glue
machines*

18

*Woodworking Machinery
Accessories & Kits*

20

Solution & Service

YIPTECH

Company profile



My father is an old carpenter with 41 years of experience in woodworking, and I grew up seeing the beautiful furniture my father made with various woodworking tools, which left me with indelible memories and inspiration.

With a rich heritage in carpentry, yiptech woodworking machinery factory was founded with the dream of making top-quality woodworking tools. Our team of engineers have over 20 years experience in the design and manufacturing of woodworking machinery, so you can be sure that when you buy from us, you're getting the best possible quality. With our commitment to customer satisfaction, we're dedicated to making sure that your experience with us is a positive one.

Our goal is to provide high-quality woodworking machines that help carpenters and furniture makers create beautiful pieces of furniture. We are the only company that offers a complete line of edge banders (From smaller ,smarter and simple to ful auomatic and customerized) , from basic models to those with advanced features like :

- 1) Automatic edge banding machines by Eva or Pur glue pots
- 2) Portable edge banding machines
- 3) Desktop edge banding machine
- 4) Pur hot glue machines& Woodworking trimming Machine
- 5) Woodworking machine tools and kits accessories


We also offer customized solutions to meet the specific needs of our customers.

Since our company was founded, we have been committed to the development and production of woodworking machineries . Our machines are sold all over the world and are highly regarded by customers. We take pride in our products and always put the needs of our customers first.

FACTORY'S Gallery



CERTIFICATES

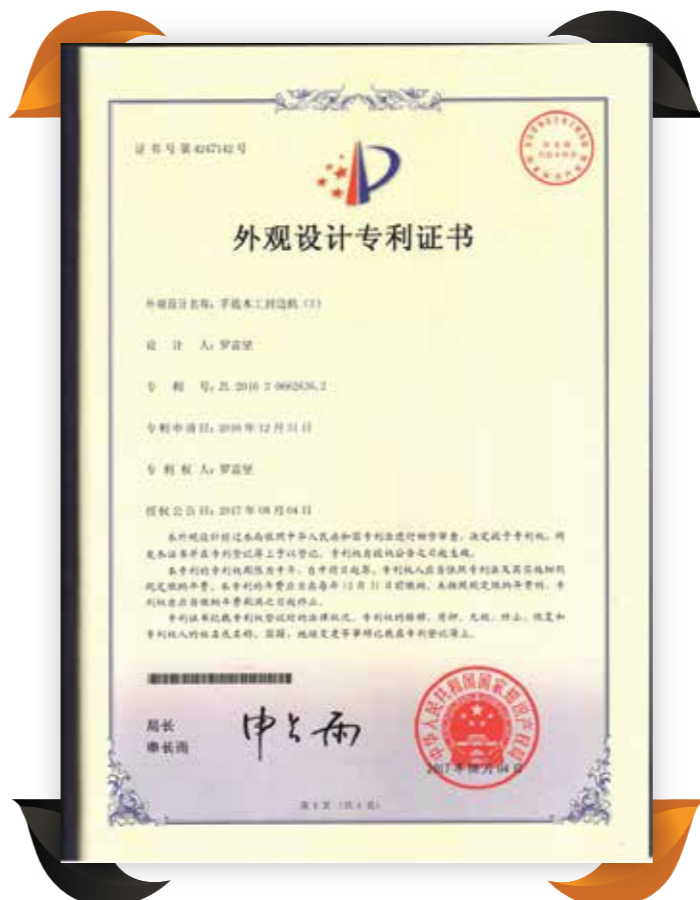


WOODWORKING AUTOMATIC EDGE BANDING MACHINE




Cassette automatic tool setting to accurate fix the location edge banding



Pur glue pot special glue coating shaft anti-pinhole patented design, cross-line more perfect

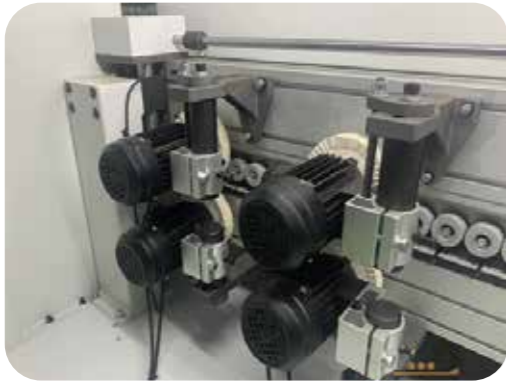

Double sets Pneumatic polishing to be more perfect

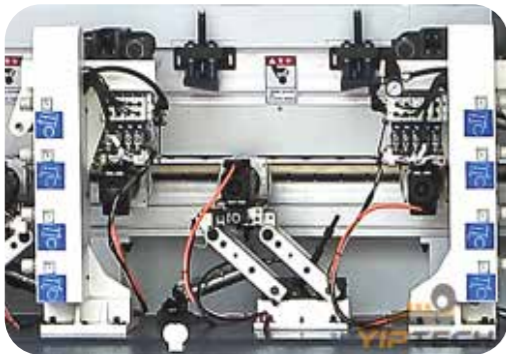

Four motor tracking to be get more perfect round corners





Product Model : YP-26

PRODUCT SPECIFICATION

Machine function	"Automatic edgebanding,trimming, all-in-onemachine"
Net weight	85kg
Dimensions	1160×560×700MM
Total power	2.115kw
Voltage	220V/110V,50~60Hz
Edge band thickness	0.3-3MM
Edge band width	10-60MM
Feed speed	0.5-5m/min
Working temperature	120-180°
Coating Glue way	double-sidedglue
Grossweight	110kg
Volume	120×57×66CM



Automatic feeding system,Integrated die-cast aluminum alloy rubber wheels



Japanese pure copper motor, Trimming system



Double-sided gluing system



Product Model : YP-27

PRODUCT SPECIFICATION

Machine function	"High-speed automatic edgebanding ,trimming,cutting , dedust bag all-in-one machine"
Net weight	122kg
Dimensions	1900*890*1120mm
Total power	4kw
Voltage	220V/110V,50~60Hz
Edge band thickness	0.3-3MM
Edge band width	10-60MM
Feed speed	0-10m/min
Working temperature	120-180°
Coating Glue way	double-sidedglue
Grossweight	150kg
Volume	138x107x62cm



Automatic feeding system, Integrated die-cast aluminum alloy rubber wheels



Japanese pure copper motor, Trimming & Cutting system




Modular integrated control panel, safe and durable



Product Model : YP-25

PRODUCT SPECIFICATION

Machine function	"Portable edge banding,trimming, all-in-onemachine"
Net weight	57kg
Dimensions	1380×530×510MM
Total power	2.2kw
Voltage	220V/110V,50~60Hz
Edge band thickness	0.3-3MM
Edge band width	10-60MM
Feed speed	0.5-5m/min
Working temperature	120-180°C
Coating Glue way	double-sidedgluing
Grossweight	67kg
Volume	910×530×590MM

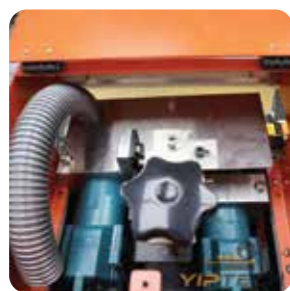


Automatic feeding system



Double-sided gluing System



Trimming and end-cutting system



Product Model : YP-660

PRODUCT SPECIFICATION

Feed rate	16m / 20m / 23m / min
Edge band thickness	0.4-3mm
Edge band width	10-65mm
Sheet thickness	10-60mm
Sheet width	60mm
Total power	12.63kw
Working pressure	0.6mpa
Dimensions	5659*1000*1600mm



Accurate pre-milling



End trimming



Sharp and Durable Diamond knives for Pre-milling



Product Model : **YP-660QD**

PRODUCT SPECIFICATION

Feed rate	16m/20m/23m/min
Edge band thickness	0.4-3mm
Edge band width	10-65mm
Sheet thickness	10-60mm
Sheet width	N60mm
Total power	12.63kw
Working pressure	0.7mpa
Dimensions	5700*1000*1600mm

* YP-660QD Machine working process



High Precision End trimming



Acurrate trimming unit



4 Motors Corner tracking system



Product Model : **YP-670QD**

PRODUCT SPECIFICATION

Feed rate	16m/20m/23m/min
Edge band thickness	0.4-3mm
Edge band width	10-65mm
Sheet thickness	10-60mm
Sheet width	60mm
Total power	16.5kw
Working pressure	0.7mpa
Dimensions	6610*1000*1600mm

* YP-660QD Machine working process




Precision Trimming unit



Rapid Heatin EVA Glue Unit



45 degree inclined Refine trimming unit

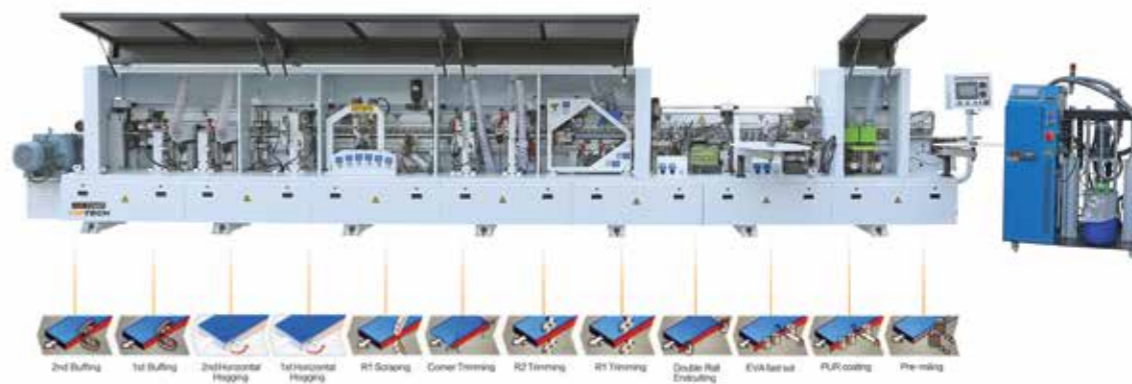

Product Model : **YP-770SP**

Product Model : **YP-770SP-2**

PRODUCT SPECIFICATION

PRODUCT SPECIFICATION

Edge band thickness	0.4-3mm
Sheet workpiece thickness	10-60mm
Conveyor speed	14m/20m/23m/min
Minimum width of sheet	60mm
Minimum length of sheet	N80mm
Total power	34kw (Connect the inverter to the motor)
Working pressure	0.7Mpa
Dimensions	9500*1000*1600mm, 1200*600*1500mm (for option)
Equipment weight	3080kg

Edge band thickness	0.4-3mm
Sheet workpiece thickness	10-60mm
Conveyor speed	14m/20m/23m/min
Minimum width of sheet	60mm
Minimum length of sheet	N80mm
Total power	34kw (Connect the inverter to the motor)
Working pressure	0.7Mpa
Dimensions	9500*1000*1600mm, 1200*600*1500mm (for option)
Equipment weight	3080kg

* YP-770SP Machine features

* YP-770SP-2 Machine features



Pur Glue pot unit



Double guide rails end cutting



Double Set Buffering system



Pur Glue pot unit



Double guide rails end cutting



Double Set Buffering system



Product Model : **YP-870QD**

PRODUCT SPECIFICATION

Edge band thickness	0.4-3mm
Sheet workpiece thickness	10-60mm
Conveyor speed	20m/23m/26m/min
Minimum width of sheet	60mm
Minimum length of sheet	80mm
Total power	28kw (Connect the inverter to the motor)
working pressure	0.7Mpa
Dimensions	11800*1200*1680mm
Equipment weight	3580kg

* YP-870 P Machine features



EVA Glue box unit



Double Set Buffing system



Auxiliary feeding device

YIPTECH edge banding machine can be laminated different materials on different files like Wood veneer, Acrylic, ABS strips, Plastic strips, Petg, Pvc foil on Plywood, Particles board, Mdf, HPF, Honeycomb panels ...




Kitchen Cabinets ABS



Cabinet Acrylic edge




Straight PVC Edge

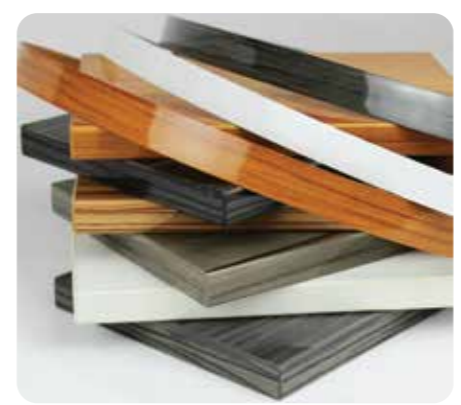

High Glossy PVC



Kitchen Cabinet Acrylic

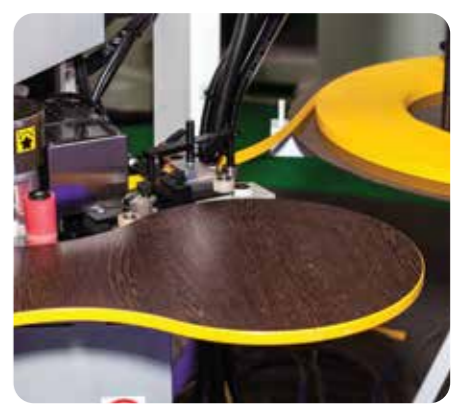

Curved PVC Edge



Drawer Door PVC



Door PVC Edge


WOODWORKING PORTABLE EDGE BANDING MACHINE



Integrated die-cast aluminum alloy rubber wheels, comparable to the configuration of large-scale edge banding machines, no degumming for ten years



In the portable mode, any special-shaped plate can complete the edge banding work

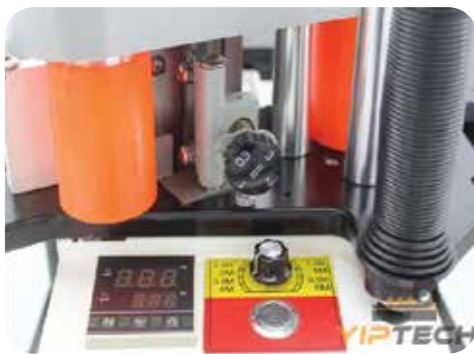

High-precision temperature control meter, real-time adjustment of hot melt temperature





Product Model : **YP-08**

PRODUCT SPECIFICATION

Net weight	9.5kg
Dimensions	340×310×350MM
Total power	0.765Kw
Voltage	220V / 110V,50~60Hz
Edge band thickness	0.3-3MM
Edge band width	10-45MM
Feed speed	0.5-5m / min
Working temperature	120-180°C
Coating Glue way	single-sided gluing
Gross weight	14kg
Volume	380×300×420MM



Motor Key cover



Rubber Cylinder Cover



Glue adjustment knob



Product Model : **YP-09**

PRODUCT SPECIFICATION

Net weight	9.5kg
Dimensions	340×310×350MM
Total power	0.765Kw
Voltage	220V / 110V,50~60Hz
Edge band thickness	0.3-3MM
Edge band width	10-45MM
Feed speed	5m / min
Working temperature	120-180°C
Coating Glue way	single-sided gluing
Gross weight	14kg
Volume	380×300×420MM



Stepless speed regulation



Full Package system



Portable edge banding machine



Product Model : **YP-12B**

PRODUCT SPECIFICATION

Net weight	9.5kg
Dimensions	340×310×350MM
Total power	0.765Kw
Voltage	220V / 110V,50~60Hz
Edge band thickness	0.3-3MM
Edge band width	10-45MM
Feed speed	0.5-5m / min
Working temperature	120-180°C
Coating Glue way	single-sided gluing
Gross weight	14kg
Volume	380×300×420MM



Double-sided gluing system



Curved special-shaped edge banding



High-precision temperature control meter



Product Model : **YP-18L**

PRODUCT SPECIFICATION

Net weight	38kg
Dimensions	500×575×570MM
Total power	1.150kw
Voltage	220V/110V,50~60Hz
Edge band thickness	0.3-3MM
Edge band width	10-60MM
Feed speed	0.5-5m/min
Working temperature	120-180°C
Coating Glue way	double-sidedgluing
Gross weight	41.5kg
Volume	635×595×670MM



Double-sided gluing system



Portable control panel



End cutting system



Product Model : YP-PUR-L

PUR HOT MELT GLUE MACHINE

Scope of application :

PUR Hot melt glue machine can be widely used in Woodworking laminating and edge banding machine , textile fabric composite, PET transparent box, automotive interior parts, lamp, book binding, glue bonding production process, printing, packaging, clothing, shoes, electronics, furniture, etc. Product assembly in various industries.

PRODUCT SPECIFICATION

System Type	Speed control AC motor gear pump
Barrel diameter	∅280mm
Maximum glue supply amount	18kg/H
Output pipe	1 line (or 2 lines)
Maximum working pressure	8.5Mpa
Operating temperature scope	40-200°C
Environment temperature scope I	0-50°C
Temperature control precision	±1°C
Temperature sensor	Pt100
Power supply	220V
Maximum system power	7.5KW
Air pressure applied	0.5~0.8Mpa
Weight	180kg
Connection signal	2input,2output
Installation size	1000mm×500mm×1500mm
Level of prevention	IP54



Product Model : **YP-PUR5**

PRODUCT SPECIFICATION

System Type	Speed control AC motor gear pump
Barrel diameter	∅280mm(286mm)
Maximum glue supply amount	20kg/H
Output pipe	1 line (or 2 lines)
Maximum working pressure	8.5Mpa
Operating temperature scope	40-200°C
Environment temperature scope I	0-50°C
Temperature control precision	±1°C
Temperature sensor	Pt100
Power supply	220V
Maximum system power	3.5KW
Air pressure applied	0.5~0.8Mpa
Weight	195kg
Connection signal	2input,2output
Installation size	1030mm*550mm*1450mm
Level of prevention	IP54


















Product Model : **YP-PUR55**

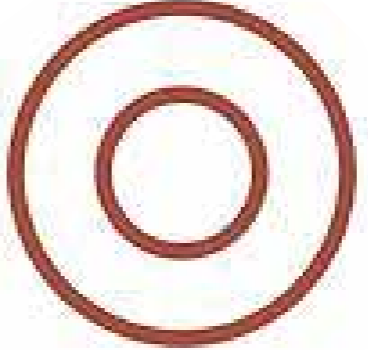



PRODUCT SPECIFICATION

System Type	Speed control AC motor gear pump
Barrel diameter	∅567mm(571mm)
Maximum glue supply amount	180kg/H
Output pipe	1 line (or 4lines)
Maximum working pressure	70Mpa
Operating temperature scope	40-250°C
Environment temperature scope I	-20-50°C
Temperature control precision	±1°C
Temperature sensor	Pt100/K
Power supply	380V3P+N
Maximum system power	30KW
Air pressure applied	0.5~0.8Mpa
Weight	490kg
Connection signal	2input,2output
Installation size	1450mm*900mm*1650mm
Level of prevention	IP54

PUR hot melt Glue machine Accessories

<p>01</p> 	<p>02</p> 	<p>03</p> 	<p>04</p> 	<p>05</p> 
<p>350mm Nozzels YP019</p>	<p>400mm Nozzels YP020</p>	<p>650 Nozzels YP021</p>	<p>1350 Nozzels YP022</p>	<p>EVA melt glue unit YP015</p>
<p>06</p> 	<p>07</p> 	<p>08</p> 	<p>09</p> 	<p>10</p> 
<p>Edge banding Pur glue Pot YP016</p>	<p>Hot glue handle YP028</p>	<p>hot glue handle YP027</p>	<p>O-ring 5 gallon& 55 gallon YP017</p>	<p>One Connect Noozel YP026</p>
<p>11</p> 	<p>12</p> 	<p>13</p> 	<p>14</p> 	<p>15</p> 
<p>Pin valve YP023</p>	<p>Pur glue Pipes YP018</p>	<p>Two connector Nozzel YP026</p>	<p>Fliters core YP024</p>	<p>Glue Mouth YP025</p>

Woodworking machinery Tools& kits

<p>01</p> 	<p>02</p> 	<p>03</p> 	<p>04</p> 	<p>05</p> 
<p>Corner Trimming machine YP002</p>	<p>Corner Trimming machine YP001</p>	<p>350mm scrapers</p>	<p>Plastic trimmer YP008</p>	<p>Steel trimmer YP007</p>
<p>06</p> 	<p>07</p> 	<p>08</p> 	<p>09</p> 	<p>10</p> 
<p>Plastic trimmers YP009</p>	<p>Edge trimmer YP004</p>	<p>Enhanced trimming knife YP005</p>	<p>Standard Trimming knife YP006</p>	<p>Edge banding machine heating tube YP010</p>
<p>11</p> 	<p>12</p> 	<p>13</p> 	<p>14</p> 	
<p>Big and Small saw blade YP015</p>	<p>Edge banding adhesive YP013</p>	<p>Edge banding adhesive YP012</p>	<p>EVA edge banding Adhesive YP011</p>	

WELCOME TO BE OUR GLOBAL PARTNER

Our Advantages

With a rich heritage in carpentry, yiptech woodworking machinery factory was founded with the dream of making top-quality woodworking machines and tools with 13 years.

What quality services can we provide you ?

Pre-Sales Service :

Free Sample Machining Service : Send us requests , we will arrange free sample machining test in our factory, make ful video to show you the process and result, or send samples to you to check the machining quality.

Machining Solution Design : According to customer's requirements, we can design the unique solution that supports higher manufacturing efficiency and better machining quality for customer.

Custom and OEM Service The divisions and partnerships of yiptech welcome both custom work and OEM customers.

We have a broad range of capabilities and manufacturing strengths, which makes it possible for yiptech to customize our existing products for OEM customers.

Before Delivery service : we will take ful test videos of your order before delivery , after you checking yes ,and to pay the rest balance to arrange logistics to your port or hand.

After-Sales Service :

We will supply the edge bander machine with training video and user's manual in English for installing, operation, maintenance and trouble-shooting, and shall give technical guide by Desktop remote, E-mail, Telephone, Mobile, Whatsapp, Skype, 24/7 online chat, and so on, when you meet some problem of installation, operation or adjusting. (Recommended)

You can come to our factory for training without Covid . Direct and effective face-to-face training. Here we have assembled equipment, all sorts of tools and testing facility. Training Time: 3~5 days (recommended)

Our engineer will do a door-to-door instruction training service at your local site. We need your help to deal with the visa formality, prepaid traveling expenses and accommodation to us during the business trip and service period before their dispatch. It's better to arrange a translator for both of our engineers during the training period."

How to solve the problem of high transportation cost ?

After years national trade accumulation , Yiptech has reached strategic cooperation with large logistics companines in china by sea ,air ,express and railway transporation channels , and can provide you with high quality logistic services .

